

1. ČELIČNA UŽAD I LANCI Wire ropes and chains

1.11. Visokootporni lanac za dizanje


RX-lift

Lanac G80 EN 818-2 RX-lift


Chain acc. to EN 818-2 G80

2.1 2.2 CE BL

Promjer a (mm)	Nosivost (t)	Min. prekidna sila (t)	b (mm)	c (mm)	Broj karika / 1m	Težina (kg/m)
Diameter	WLL	MBL			Links per m	Weight
6	1,12	4,48	18	22	55,5	0,78
7	1,5	6,0	21	26	47,6	1,14
8	2,0	8,0	24	30	41,6	1,5
10	3,15	12,6	30	36	33,3	2,27
13	5,3	21,2	39	47	25,6	3,74
16	8	32,0	48	58	20,8	5,54
20	12,5	50,0	60	72	16,6	8,94
22	15,0	60,0	66	79	15,1	11,57
26	21,2	86,4	78	93	12,82	15,26
32	31,5	126	96	112	10,42	22,6

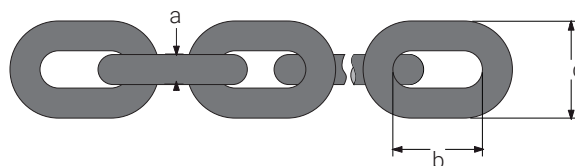

- lanac prema standardu: EN 818-2 (DIN5687)
- visokokvalitetni lanac G80 za prijenos i osiguranje tereta
- specijaliziran za dinamička i statička opterećenja
- kalibrirane karike lanca, dopuštenja odstupanja u dimenzijama samo +/-3%
- faktor sigurnosti: 4:1
- temperatura rada za: -40°C do + 200°C (WLL 100%)
- oznake dimenzije i kvalitete na karikama
- dostupni elementi za lanac G80
- završna obrada: prirodna boja, ili lakirani




Lanac G100

Chain according to EN 818-2, grade G100

GUNNEBO

2.1 2.2 CE BL

Promjer a (mm)	Nosivost (t)	Prekidna sila (kN)	b (mm)	c (mm)	Težina (kg/m)
Diameter	WLL	MBL			Weight
6	1,5	58,9	18	20,5	0,87
7	1,95	77	21	24,0	1,14
8	2,5	102	24	27,0	1,45
10	4,0	158	30	34,0	2,25
13	6,8	268	39	43,7	3,76
16	10,0	402	48	53,9	5,64
20	16,0	630	60	67,0	9,4
22	20,0	785	66	73,0	11,9
26	27,0	1062	78	87,0	16,4
32	40,0	1610	96	105,6	25,8

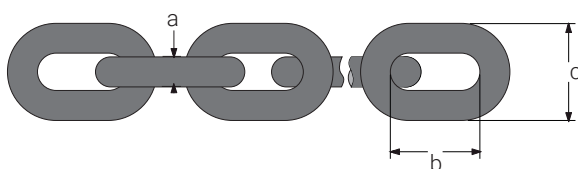

- lanac prema standardu: EN 818-2
- visokokvalitetni lanac za prijenos i vuču tereta
- 25% jači od lanca G80
- specijaliziran za dinamička i statička opterećenja
- kalibrirane karike lanca
- faktor sigurnosti: 4:1
- temperatura rada za: -40°C do + 200°C (WLL 100%)
- dostupni elementi za lanac G100
- završna obrada: plastificirani plavi

