


## 5. DIZALICE, KOLICA I HVATALJKE Hoists, clamps

### 5.3. Ostale ručne mehaničke dizalice i vitla

#### Ručno vitlo tip BHW RX-lift

##### Hand winch type BHW RX-lift


2.1 2.2 CE

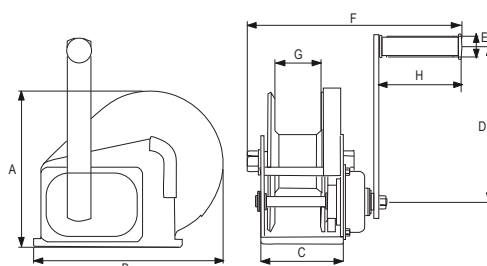

- EN 13157
- opcije: cinčano, lakirano, inox

Kapacitet povlačenja (kg)	Kapacitet povlačenja (lbs)	Ispitna sila (kN)	Omjer okretaja	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Neto težina (kg)
Capacity	Capacity	Test load										Net weight
545	1200	8	4.2:1	156	184	88	210	27	272	51	109	3,5
825	1800	12,3	5:1	203	256	107	319	27	283	60	109	8,0
1200	2600	17,64	10:1	216	293	127	319	27	305	63	109	10,5

- automatska kočnica, otpuštanje u suprotnom smjeru od povlačenja



- cinčani čelični zupčanici



- prije namatanju č. užeta, fiksirati ga na vitlo vijskom i maticom vitla



- kod otpuštanja tereta uvijek bi trebalo ostati 2-3 namotaja užeta.

#### Dizalica mehanička tip "Farm jack" RX-lift

##### Farm jack RX-lift

2.1 2.2

Kapacitet (kg)	Veličina (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Neto Težina (kg)
Capacity	Dimension					Net weight
3,5	84	79-26	18	10	63-10	8
3,5	122	117	18	10	84-6	10
3,5	152	145	18	10	84-6	12

